Universal PID Controller

PID500-U



48 x 48mm

Features :

- 4+4 Digits, (White+Green) LED display
- Capacitive touch keypad, Short depth
- Universal input/ output
- Retransmission analog output
- Adaptive - Auto - Self tune PID/ ON - OFF Control
- Heat cool PID
- Profile Controller up to 128 steps
- RS485 MODBUS RTU Communication (optional)
- IDM applicable

Certifications: CE RoHS compliant, IP65


Technical specifications

Display specifications	
Display	4+4 digits 7 Segment LED dual display
Height of display	Upper display: 15.3mm (White), Lower display: 8mm (Green)
LED indication	1: Main output T: Tune 2: Alarm output M: Manual output 3: Alarm output A: Adaptive tune
Input specifications	
Contact rating	Thermocouple (J, K, T, R, S, C, E, B, N, L, U, W, Platinel II), RTD (PT100)
Signal input	- 5 to 56mV, 0 to 10V, 0 to 20mA DC (Programmable scale type)
Accuracy / Resolution	
Resolution (Decimal point position)	1/ 0.1 for TC/ RTD ; 1/ 0.1/ 0.01/ 0.001 for analog input
Signal input	- 5 to 56mV, 0 to 10V, 0 to 20mA DC (Programmable scale type)
Indication accuracy	For TC inputs: 0.25% of F.S. ±1; For R & S type TC inputs: 0.5% of F. S. ±2 (20 min of warm up time for TC inputs); For RTD input: 0.1% of F. S. ±1; For Analog input: ±0.5%, ±1 digit (F. S. = Full scale)
Temperature unit	°C/°F selectable
Input filter (FTC)	1 to 99sec, OFF
Sampling time	200 ms
Output specifications	
Contact rating	Relay 1, Relay 2: 7A@250 VAC or 28 VDC; Life expectancy: 100000 cycles at maximum load rating Relay 3: 10A@250 VAC or 28 VDC
SSR drive (Voltage pulse)	15 VDC
Current	0-20mA DC, 4-20mA DC (loop impedance: 500Ω max)
Voltage (Optional)	0-5 VDC, 0-10 VDC (load resistance: 10KΩ min)
Retransmission	
Current	0/ 4 to 20mA DC (loop impedance: 500Ω max)
Voltage (For PID500-U-0-1)	0 to 5/ 10 VDC (load resistance: 10KΩ min)
Update rate	100 ms
Functional specifications	
Control action	1: Adaptive - Auto - Self tune PID, 2: ON-OFF
Proportional band (P)	0.0 to 400.0°C
Integral time (I)	0 to 3600 sec
Derivative time (D)	0 to 200 sec
Cycle time	0.1 to 100.0 sec
Hysteresis width	0.1 to 99.9°
Manual reset value	- 19.9 to 19.9°
Heat-cool	
Control action	PID/ ON-OFF
Proportional band-cool	0.0 to 400.0°
Cycle time-cool	0.1 to 100 sec
Dead band	Programmable from set point low limit to set point high limit.


Settings for alarm output	
Modes	Deviation high/ low, Absolute high/ low, Band, Sensor break
Hysteresis	0.1 to 99.9°
No. of profile program	8
No. of steps in each program	16
Program other profile parameters	Link profiles, Programmable repeat cycles, Power down resume/ restart options, Deviation hold, Alarm at each step with configurable alarm duration
Auxiliary supply specifications	
Supply voltage	90 to 270 VAC/ DC (50/ 60Hz)
Power consumption	5 VA max @ 230 VAC
Environment specifications	
Temperature	Operating: 0°C to 50°C (32 to 122°F); Storage: 20°C to 75°C (- 4 to 167°F)
Humidity (non - condensing)	85% RH
Mechanical specifications	
Mounting	Panel
Weight	101 gms
Optional specifications	
Serial communication	
Interface standard	RS485
Communication address	1 to 99, maximum of 32 units per line
Transmission mode	Half duplex
Transmission protocol	MODBUS RTU
Transmission distance	500m maximum
Transmission speed	115200, 57600, 38400, 9600, 4800, 2400, 1200 bits/ sec
Parity	None, Odd, Even
Stop bits	1 or 2
Response time	100 ms (Max and independent of boud rate)

Terminal connections


PID500-U-0-1

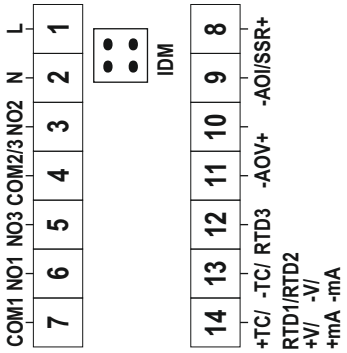


PID500-U-C-1

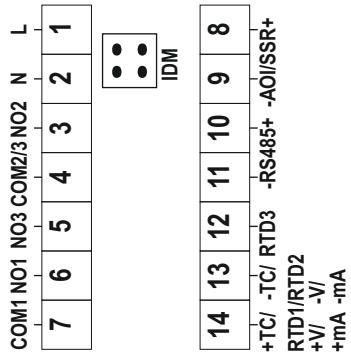


Dimensions (All are in mm)



Front bezel



Side view



Panel Cutout

MODELS / DIM	A	B	C	D	E	F	G
PID500-U	52	52	76	45	4	46	46

Compliance

Applicable EMI / EMC Standards		
Product Standard : IEC 61326-1		
Category		**Standards Compliance**
ESD Immunity	IEC 61000-4-2	Level III
Surge Immunity	IEC 61000-4-5	+/- 2 kV common mode, +/- 1 kV differential mode
Radiated Susceptibility	IEC 61000-4-3	Level III, 80 to 1000MHz Level II, 1.4GHz to 2GHz Level I, 2GHz to 2.7GHz
Conducted Susceptibility	IEC 61000-4-6	Level II

Applicable EMI / EMC Standards		
Product Standard : IEC 61326-1		
Category		**Standards Compliance**
Voltage Dips and Interruptions	IEC 61000-4-11	**Dips** : 0% residual voltage / 1 cycle (Criteria B), 40% residual voltage / 10 cycles 50Hz / 12 cycles 60Hz (Criteria C)70% residual voltage / 25 cycles50Hz / 30 cycles 60Hz (Criteria C) **Interruptions** : 0% residual voltage / 250 cycles 50Hz / 300 cycles 60Hz (Criteria C)
Conducted Emission	CISPR-11	Class A (150KHz to 30MHz)
Radiated Emission	CISPR-11	Class A (30MHz to 1GHz)
Electrical Fast Transient	IEC 61000-4-4	Level III

Ordering information

Product code	Input	Supply voltage	Communication (RS485)	Certification
PID500-U-0-1	Universal	90 - 270 VAC/ DC	- - -	CE
PID500-U-C-1	Universal	90 - 270 VAC/ DC	YES	CE