


48 x 48mm

## Features :

- ON delay / Interval
- 12 time ranges
- Universal supply voltage
- LED indications : Power ON, Relay ON
- Compact size

Certifications : CE cULus E253771

### Display specifications

| | |
|---|---|
| LED indications | Power ON, Relay ON |

### Input specifications

| | |
|---|---|
| Accuracy | Setting : ±5% of F.S.<br>Repeat : ±0.5% or 50msec (F.S. = Full scale) |

### Output specifications

| | |
|---|---|
| Relay contact | 2 C/O SPDT |
| Contact rating | 5A @ 250V AC / 24V DC, Resistive |

### Functional specifications

| | |
|---|---|
| Modes | ON delay / Interval |
| Time ranges | 0 - 1sec / min / hr<br>0 - 3sec / min / hr<br>0 - 10sec / min / hr<br>0 - 30sec / min / hr |
| Resolution | 0.1sec |
| Reset | On interruption of power;<br>Reset time < 100 msec |

### Auxiliary supply specifications

| | |
|---|---|
| Supply voltage | 20 to 240V AC (50 / 60Hz)<br>12 to 240V DC |
| Power consumption | 2VA max |


### Environmental specifications

| | |
|---|---|
| Temperature | Operating : 0°C to 50°C (32 to 122°F)<br>Storage : -20°C to 75°C (-4 to 167°F) |
| Humidity (non - condensing) | 95% RH |


### Mechanical specifications

| | |
|---|---|
| Mounting | Plug / Panel mount |
| Weight | 100 gms |


### Dimensions

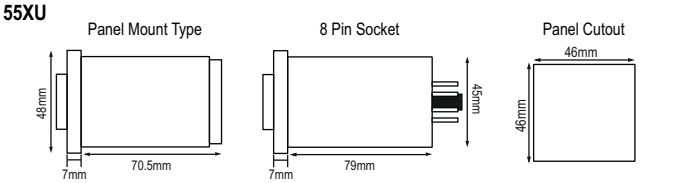


### Terminal connections

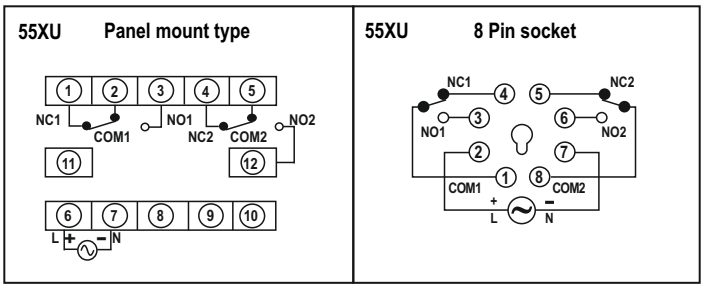


### Timing diagram

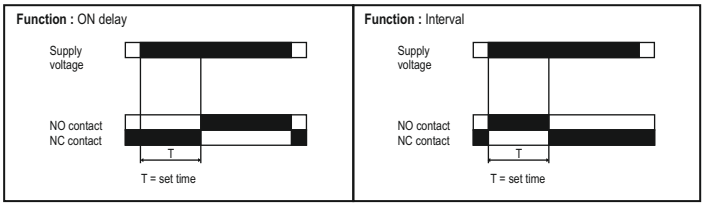


## Ordering information

| Product code | Supply voltage | Certification |
|---|---|---|
| 55XU-P8-230V-G | 20 to 240V AC, 12 to 240V DC | CE cULus E253771 |
| 55XU-T-230V-G | 20 to 240V AC, 12 to 240V DC | CE cULus E253771 |