Thumbwheel, Multifunction Timers

XT264A / XT364A



72 x 72mm

96 x 96mm

Features :


- 3 digits, 7 segment LED timer
- Single set point
- On delay / Interval
- 2 relay (SPDT)
- 7 time ranges
- Down counting

Technical specifications


Display specifications	
Display	3 digits, 7 segment LED timer
LED indication	Relay status
Input specifications	
Start input	Pulse start
Accuracy	± 0.05% of F.S. or 50msec (whichever is greater)
Output specifications	
Contact rating	Relay: NO: 10A 250V AC / 24V DC NO/ NC: 5A / 5A 250V AC / 24V DC
Relay contact	2X SPDT
Functional specifications	
Time ranges	9.99, 99.9, 999 sec, 99.9, 999 min, 99.9, 999 hr
Modes	ON delay / Interval
Resolution	0.01sec
Counting direction	Down
Set point	1
Time setting	Pushwheel
Reset	Front, Remote, On power interruption
Memory retention	No
Auxiliary supply specifications	
Supply voltage	90 to 270V AC/DC (50/60Hz)
Environment specifications	
Temperature	Operating: 0 to 50 °C; Storage: - 5 to 75 °C
Humidity (Non-condensing)	5VA max @270V AC/DC
Mechanical specifications	
Mounting	Panel mount
Weight	XT264A - 210gm XT364A - 220gm

Terminal connections


XT264-3

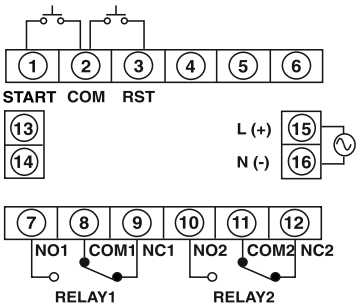


XT264A




XT364-3

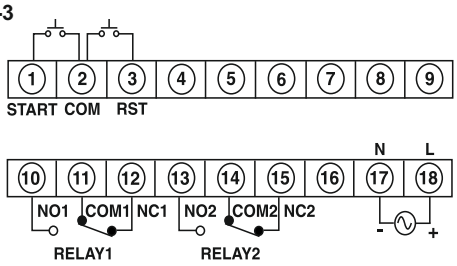

XT364A

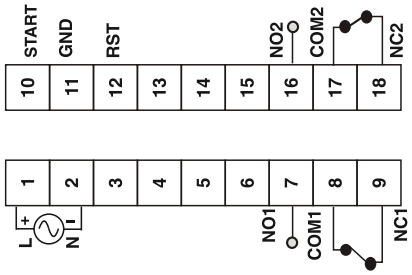

Timing diagrams

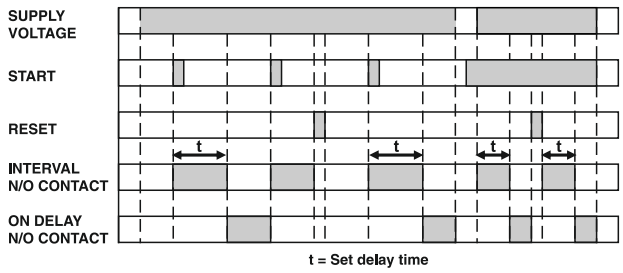

DIP switch setting for mode selection

MODE	SW 1
ON DELAY	OFF
INTERVAL	ON

DIP SWITCH SETTINGS FOR TIME RANGE

RANGE	SW2	SW3	SW4
9.99 sec	OFF	OFF	OFF
99.9 sec	OFF	OFF	ON
999 sec	OFF	ON	OFF
99.9 min	OFF	ON	ON
999 min	ON	OFF	OFF
99.9 hr	ON	OFF	ON
999 hr	ON	ON	ON

DIP SWITCH SETTING EXAMPLE




Mode - INTERVAL

Range - 99.9 Sec.

NOTE : DIP switch for range and mode settings is on the side of the Instrument

Dimensions (All are in mm)

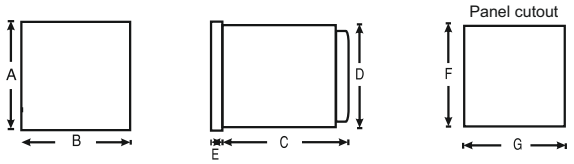

MODELS / DIM	A	B	C	D	E	F	G
XT264A	76	76	83.7	67	3.5	69	69
XT364A	100	100	73	90.5	4	92	92

Ordering information

Product code	Output1	Output2	Supply voltage	Certification
XT264A	RELAY (5A)	RELAY (5A)	90 to 270V AC/DC	- - -
XT364A	RELAY (5A)	RELAY (5A)	90 to 270V AC/DC	- - -